



(LOW FLOW FLAT FAN NOZZLES) J

LOW FLOW FLAT FAN NOZZLES

These standard flat fan nozzles are available in a wide range of capacities, spray angles and materials. Nozzles shown on this page cover the low to minimal capacity range from 0.06 to 1.60 litres per minute. The tiny outlet orifices, machined with high precision, may require to be protected from clogging by means of an adequate filter positioned inside the supply line, depending upon the quantity and type of the solid particles suspended in the liquid. These nozzles can be made with a customized inner thread for a VEF filter (*optional). We suggest to buy these nozzles with their related VEF filter.

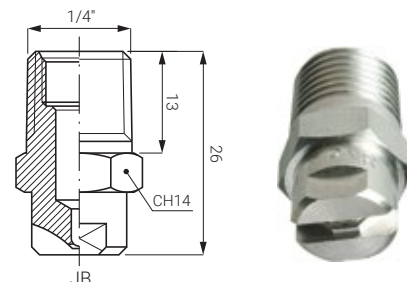


THREAD SPECIFICATION: BSPT, NPT
 TYPICAL APPLICATIONS
 Washing: steel and PCB cleaning, glass substrate cleaning
 Cooling: steel cooling, product cooling
 Other applications: pre-treatment for coating process, sewage treatment system

J nozzles series are also available with NPT thread: the code becomes H.



Spray section



Convex distribution

Spray angle	25°	40°	50°	65°	75°	80°	95°	110°	CAPACITY CODE	D mm	Capacity at different pressure values (l/min) (bar)							
	1/8"	JAD	JAL	JAN	JAR	JAS	JAT	JAV			JAJ	0.7	1.0	1.5	2.0	3.0	5.0	7.0
1/4"	JBD	JBL	JBN	JBR	JBS	JBT	JBV	JB										
0100				•					0100	0.34	0.048	0.06	0.07	0.08	0.10	0.13	0.15	0.18
0130				•					0130	0.38	0.06	0.08	0.09	0.11	0.13	0.17	0.20	0.24
0150	•	•	•	•	•	•	•	•	0150	0.40	0.07	0.09	0.11	0.12	0.15	0.19	0.23	0.27
0200	•	•	•	•	•	•	•	•	0200	0.46	0.096	0.12	0.14	0.16	0.20	0.26	0.31	0.37
0260	•	•	•	•	•	•	•	•	0260	0.53	0.10	0.15	0.18	0.21	0.26	0.34	0.40	0.47
0390	•	•	•	•	•	•	•	•	0390	0.66	0.19	0.23	0.28	0.32	0.39	0.50	0.60	0.71
0590	•	•	•	•	•	•	•	•	0590	0.79	0.28	0.34	0.42	0.48	0.59	0.76	0.90	1.08

LIMIT OF MATERIALS PROCESSING


Hard materials such as stainless steel are extremely difficult to work with small profile drills, therefore not all nozzle sizes are available in all materials. Our sales office will offer you the best choice according to the materials and specifications you require.

Material	0100	0130	0150	0200	0260	0390	0590	0780
B31 - AISI 316L				•	•	•	•	•(1)
B1 - AISI 303	•	•	•	•	•	•	•	•(2)
T1 - Brass	•	•	•	•	•	•	•	•(2)

- (1) Low capacity body
- (2) Standard capacity body

VEF THREADED FILTERS (OPTIONAL)

J series small capacity nozzles have a small diameter and can work with clean liquids. So, if you order small capacity nozzles, we suggest you to order VEF threaded filters too, to avoid clogging.

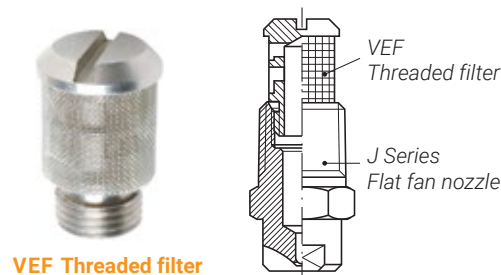

Nozzle type	Thread filter code	Thread size
JA (1/8")	VEF 0411 xx	M7
JB (1/4")	VEF 0138 xx	3/8"UNF

HOW TO MAKE UP THE NOZZLE CODE

Ex.: JAD 0130 B1

