


VACUUM PUMP

LINEAR

VP0140




MOTOR FREE
PISTON SYSTEM

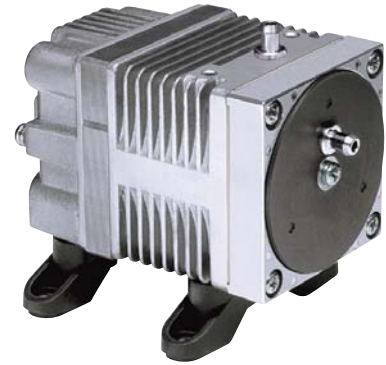

Airflow & Power Consumption


Specifications

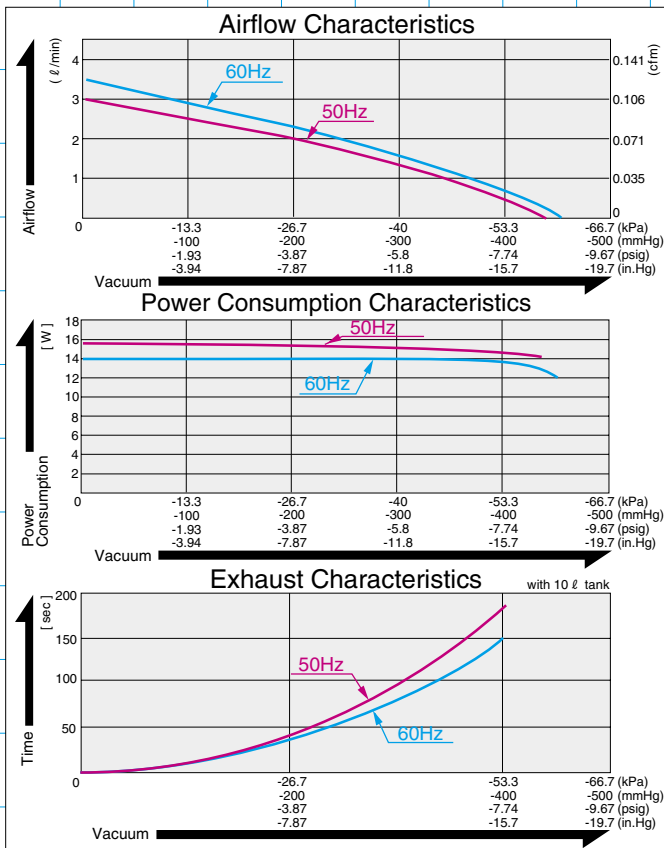


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-53.3 kPa (-400 mmHg)	-533 mbar	-15.7 in.Hg
Free Air Displacement	3 l/min		0.106 cfm
Rated Voltage	115 V AC or 230 V AC		
Power Consumption	14 W or 15 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	3,000 hours		
Inlet	6 mm O.D. hose nipple		
Outlet	6 mm O.D. hose nipple		
Duty Cycle	60 minutes		
Coil Insulation Class	E or its equivalent (JETL) and B for UL		
Mounting Dimensions	48 (L) x 62 (W) mm	1-7/8" (L) x 2-7/16" (W)	
Gross Weight	0.7 kg	1.54 Lbs.	
Leadwire Length	200 mm	7-7/8"	

Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.
*Operations at higher than -53.5kPa need an additional leak valve or relief valve on the inlet piping.

Application Examples



Page Scroller



Solder Fume Suction

Sketch Drawing and Mounting Dimensions Diagram (mm)

